




Slide Gate Valve High Density Stock Rejects


Series L
Metal or
Resilient Seat
2" - 28"

**Cast 2 Piece CF8M
Body**

- Synthetic PTFE Packing
- OPTIONS:**
 - Titanium & Alloy Bodies
 - Special Hard Seat Inserts for Abrasive Applications
 - Pneumatic, Electric or Hydraulic Operators
 - Limit Switches, Positioners Solenoid Valves and Speed Controls

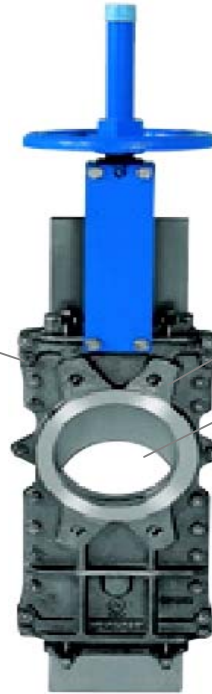

**Drilled to ANSI
B16.5-150lb.
Full "O" Port or "V"
Notch**

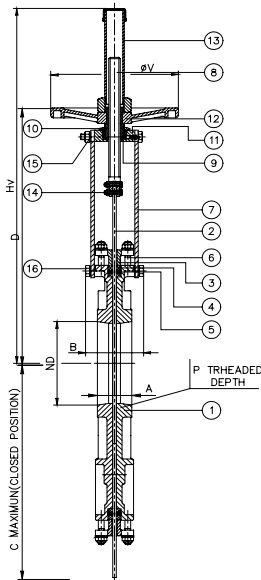

ITEM	DESCRIPTION	MATERIAL
1	BODY	CF8M
2	KNIFE	316
3	PACKING GLAND	CF8M
4	PACKING	SYNTET.+PTFE
5	O-RING	EPDM
6	STUD	316
7	SUPPORT	STEEL
8	SPINDLE	303
9	STEM NUT	BRONZE
10	NUTS	ST44.2+ZINC
11	YOKE	STEEL
12	HANDWHEEL	NODULAR IRON
13	HOOD	STEEL
14	BOLTS/NUTS/WASHERS	316
15	BOLTS/NUTS/WASHERS	STEEL
16	BOLTS/WASHERS	316

SIZE		2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"
A	in	1.57	1.57	1.97	1.97	1.97	2.36	2.36	2.76	2.76	3.78	3.94	4.17	4.33	4.33	4.33
	mm	40	40	50	50	50	60	60	70	70	96	100	106	110	110	110
B	in	3.62	3.62	3.62	3.62	4.02	4.02	4.69	4.69	4.69	11.42	11.42	11.42	11.42	11.42	12.60
	mm	92	92	92	92	102	102	119	119	119	290	290	290	290	290	320
C	in	8.86	10.43	12.01	14.37	16.93	19.49	24.80	30.12	35.24	40.16	45.87	52.17	57.09	68.90	79.72
	mm	225	265	305	365	430	495	630	765	895	1020	1165	1325	1450	1750	2025
D	in	7.68	12.60	13.62	15.20	16.54	18.54	22.91	26.38	29.69	35.00	37.95	42.64	46.18	53.27	60.04
	mm	195	320	346	386	420	471	582	670	754	889	964	1083	1173	1353	1525
V	in	7.28	7.28	7.28	7.28	8.86	8.86	12.80	12.80	14.96	18.11	18.11	18.11	18.11	18.11	24.41
	mm	185	185	185	185	225	225	325	325	380	460	460	460	460	460	620
Hv	in	16.42	17.40	18.46	20.04	23.35	25.35	32.48	39.76	43.07	51.93	54.88	63.50	67.05	77.68	93.50
	mm	417	442	469	509	593	644	825	1010	1094	1319	1394	1613	1703	1973	2375

PMP Precision Valve Company Ltd. Is a progressive supplier of current products. The features, materials of construction and dimensional data as detailed in this bulletin are intended for your reference only, and should not be relied upon unless confirmed in writing by PMP Precision Valve Co. Ltd.. Certified dimensional drawings are available upon order receipt.