

# Smart Positioners YT-3700 / YT-3750


Digital smart positioner with enhanced diagnostics

## Design features


- Enhanced diagnostic** (including offline and online) to fully check the integrity of the system. Valve signature, advanced step tests and Partial Stroke Testing (PST) can be operated from local or remote positions. Device Description (DD) and Device Type Manager (DTM) files allow for full software compatibility.
- Visual diagnostic info** to NE107 standard for a user-friendly analysis with a severity alarm scale and a clear visual identification locally on the display or remotely through HART®.
- Digital input/output configurable** depending on the application and customer preferences. Multiple options are available e.g. start a pre-set PST event or receive error alarms, tailoring interaction with the device as necessary.
- Auto tuning** functionality.
- Non-contact sensor** for increased performance for high frequency operating valves and an enhanced lifetime.



### YT-3700 Aluminium Enclosure

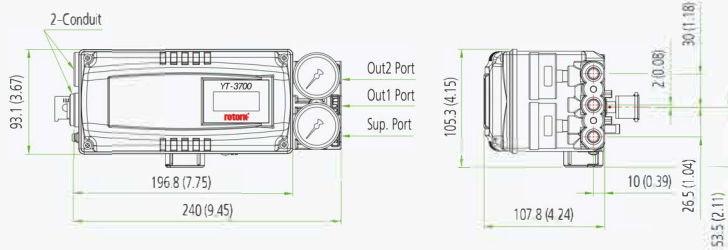

### YT-3700 Aluminium Enclosure With Limit Switches and Dome Indicator



### YT-3750 STS316 Enclosure



# Smart Positioners YT-3700 / YT-3750

| Item Type                 | YT-3700   | YT-3750  |
|---------------------------|---|--|
| Input Signal              | 4-20 mA DC  |  |
| Supply Pressure           | 0.14 to 0.7 MPa = 1.4 to 7 bar = 20 to 102 psi  |  |
| Stroke                    | Linear Type   | 10 to 150 mm (0.4 to 6")   |
|                           | Rotary Type   | 55 to 110°   |
| Impedance                 | Max. 500 Ω @ 20 mA DC   |  |
| Air Connection            | Rc1/4, 1/4NPT, G1/4   | 1/4NPT   |
| Gauge Connection          | Rc1/8, 1/8NPT   | 1/8NPT   |
| Conduit                   | G1/2, M20, 1/2NPT   | G1/2   |
| Operating Temp.           | Standard Type   | -30 to +85 °C (-22 to +185 °F)   |
|                           | Low Temp. Type  | -40 to +85 °C (-40 to +185 °F)   |
|                           | Arctic Type   | -55 to +85 °C (-67 to +185 °F)   |
|                           | LCD   | withstands -55 to +85 °C (-67 to +185 °F) only visible above -40 °C (-40 °F) |
| Linearity                 | ±0.5% F.S.  |  |
| Hysteresis                | ±0.5% F.S.  |  |
| Sensitivity               | ±0.2% F.S.  |  |
| Repeatability             | ±0.3% F.S.  |  |
| Air Consumption           | Below 2 LPM (sup = 0.14 Mpa)<br>Below 0.07 CFM (sup = 20 psi)   |  |
| Flow Capacity             | 70 LPM (sup = 0.14 MPa)<br>2.47 CFM (sup = 20 psi)  |  |
| Output Characteristics    | Linear, EQ%, Quick Open, User Set (5, 21 points)  |  |
| Material                  | Aluminium Diecasting  | Stainless Steel 316  |
| Ingress Protection        | IP66, NEMA 4X   |  |
| Explosion Protection Type | <b>ATEX / IECEx</b><br>Ex ia IIC T5/T6 Gb<br>Ex ia IIIC T100°C/T85°C Db IP 6x                                   |  |
|                           | <b>CCC / Nepsi</b><br>Ex ia IIC T5/T6 Gb<br>Ex iaD 21 T100°C/T85°C  |  |
|                           | <b>FM / CSA / EAC</b><br>Intrinsically Safe. Refer to the product manual for details.                           |  |
|                           | <b>KCs</b><br>Ex ia IIC T5/T6 Gb<br>Ex ia IIIC T100°C/T85°C   |  |
|                           | <b>INMETRO</b><br>Ex ia IIC T5/T6 Gb<br>Ex ia IIC T100°C/T85°C Db IP66  |  |
|                           | <b>SIL</b><br>SIL2 and SIL3<br>Non-interference device statement for SIS  |  |
| Communication (Option)    | HART (ver.7)  |  |
| L/S Rating                | Mechanical Type (Omron)   | AC 125 V, 3 A / DC 30 V, 2 A   |
|                           | Proximity Type (P&F)  | DC 8.2 V 8.2 mA  |
| Weight                    | 2 kg (4.4 lb)   | 5.1 kg (11.2 lb)   |
| Digital Input             | Low level control voltage 0 to 5 VDC<br>High level control voltage 11 to 28 VDC<br>Max current < 4 mA           |  |
| Digital Output            | Supply voltage 5 to 28 VDC<br>Low level current < 1 mA<br>High level current > 2.1 mA @5 VDC,<br>< 14mA @28 VDC |  |

## Product Code

**YT-3700 - L - S - N - 2 - 4 - 2 - 4 - S**

### Model

YT-3700 = Aluminium housing  
YT-3750 = Stainless steel housing

### Motion Type

L = Linear  
R = Rotary (in case of a switches request the device will have visual position indicator as standard)

### Acting Type

S = Single  
D = Double

### Explosion Protection

N = Non-explosion  
i = Intrinsically Safe ATEX, IECEx, NEPSI, KCs  
A = Intrinsically Safe CSA, FM (Both S and L of Operating Temp. available.)  
E = Intrinsically Safe EAC  
Z = Intrinsically Safe CCC

### Lever Type

|                  |           |
|------------------|-----------|
| Linear           | Rotary    |
| 0 = 10 to 40 mm  | 5 = NAMUR |
| 1 = 20 to 100 mm |           |
| 2 = 90 to 150 mm |           |

### Conduit & Air Connection

1 = G1/2 - Rc1/4 (N/A for YT-3750)  
2 = G1/2 - 1/4 NPT  
3 = G1/2 - G1/4 (N/A for YT-3750)  
4 = M20 - 1/4 NPT (N/A for YT-3750)  
5 = 1/2 NPT - 1/4 NPT (N/A for YT-3750)

### Communication Protocols

2 = HART communication

### Output Options

0 = None (Digital I/O are built-in)  
1 = 4-20 mA feedback (Digital I/O are built-in)  
4<sup>1</sup> = 4-20 mA feedback + Limit Switch - Mechanical Type (potentiometer drive without digital I/O communication)  
5<sup>2</sup> = 4-20 mA feedback + Limit Switch - Proximity Type (potentiometer drive without digital I/O communication)

### Operating Temp. (Non-explosion proof)<sup>3</sup>

S = -30 to +85 °C (-22 to +185 °F) (N/A for EAC)  
L = -40 to +85 °C (-40 to +185 °F)  
A = -55 to +85 °C (-67 to +185 °F) (EAC only)

### Notes:

- Only S, L of Operating Temperature are available for 4 of Output Options
- Only S of Operating Temperature is available for 5 of Output Options
- This option is just the normal operating temperature of the product and is not related to explosion protection temperature. See certificates for explosion protection temperature.